


KCE-850W-E / KCE-850B-E

Dome Camera with Built-in DC Iris Vari-focal Lens

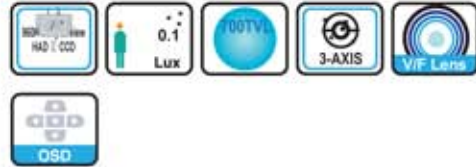

- 1/3" 960H Sony EXview HAD II CCD
- 0.1Lux at F1.2
- Super High Resolution 700TV Lines
- 2.8~12mm DC Auto Iris Varifocal Lens
- Built-in OSD Controller & 2nd BNC output
- DNR(Digital Noise Reduction)
- 3-Axis Mounting Capabilities

Specification

DESCRIPTION	NTSC	PAL
Image Sensor	1/3" 960H Sony EXview HAD II CCD	
Effective Pixels	976(H) x 494(V)	976(H) x 582(V)
Scanning System	2:1 Interface	
Synchronization	Internal	
Horizontal Resolution	700TV Lines	
Video Output	CVBS : 1.0Vp-p, 75Ω composite	
S/N (Y Signal)	52dB (AGC off)	
Min. Illumination	0.1 Lux at F1.2	
OSD	Built-in	
IRIS Adjustment	MANUAL / AUTO(DC)	
Lens	2.8~12mm DC Auto Iris Varifocal Lens	
Electronic Shutter	AUTO / MANUAL (1/60~1/10,000sec)	AUTO / MANUAL (1/50~1/10,000sec)
Backlight Compensation	BLC / HLC / OFF	
White Balance	ATW / PUSH / USER1 / USER2 / ANTI CR / MANUAL / PUSH LOCK	
AGC	MANUAL / AUTO	
ATR	ON / OFF	
Mirror	ON / OFF	
Day&Night	COLOR / AUTO / B/W	
Privacy	ON / OFF (4 zones)	
DNR	Y/C Level Adjustment	
Language	English / Japanese / German / French / Russian / Portuguese / Spanish	
Motion	ON/OFF	
Input Voltage	DC 12V(±10%) Only	
Power Consumption	170mA(max)	
Operating Temp. / Hum.	-10°C ~ +50°C / 30% ~ 80% RH	
Storage Temp. / Hum.	-20°C ~ +60°C / 20% ~ 90% RH	

Dimension

Unit : mm

