

VersaFullbody Series

iFCS®

High Resolution Day/Night

CAM3020



Introduction

Stunning image quality coupled with a long list of features, the VersaFullbody Series by iFCS are versatile fullbody cameras suitable for a wide range of applications.

Features

Super High Resolution 540 TV Lines


Providing extremely sharp 540 TV Lines resolution with the latest Sony Super-HAD CCD, the VersaFullbody Series will deliver highly detailed images in all lighting conditions.

Advanced Signal Processing

With state of the art digital signal processing, the VersaFullbody Series provide crystal clear images free of signal noise and distortion. Critical during the data compression process performed by digital video recorders or during video network transmission, a clear image will result in a picture with greater detail and a smaller file size.

Impressive Low Light Performance

Even when operating in the darkest of environments, thanks to enhanced Dynamic Noise Reduction technology and integrated Sense Up imaging, the VersaFullbody Series performs down to 0.002 Lux by providing detailed images.

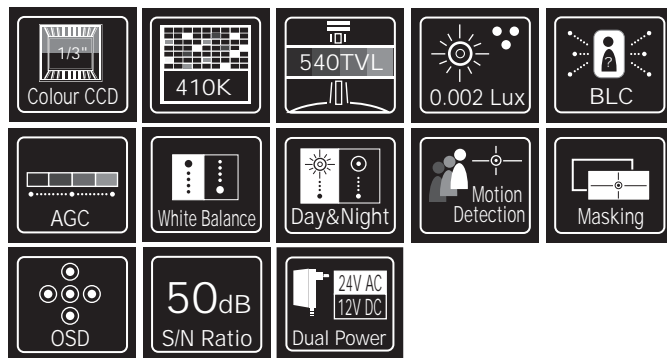

Motion Detection & Multi-Zone Camera Privacy Masking

Detect motion or mask out areas of the image for privacy reasons with four configurable zones.

On Screen Menu


Making adjustments on the VersaFullbody Series are easy via the built-in on screen menu.

Back Light Compensation

Configurable exposure correction technology ensures the intended target objects are always in view.

Dimension

CAM3020

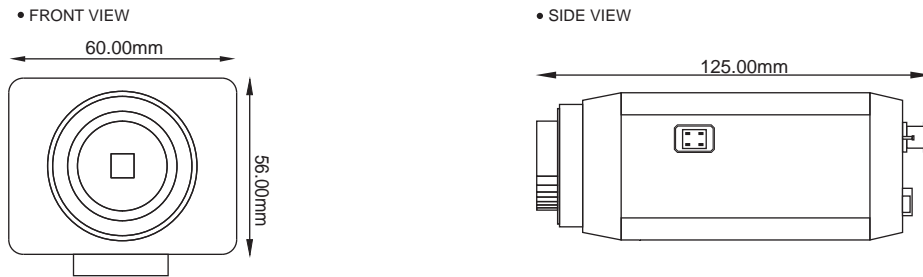

Specifications

DESCRIPTION	CAM3020
Image Pick-Up Device	1/3" Super HAD Colour CCD
TV System	NTSC / PAL
Pixels	PAL = 811(H)X 508(V)
Scanning System	2 :1 Interlaced
Sync System	Internal (DC) / Line Lock (AC)
Resolution	540TV Line
Minimum Illumination	0.002Lux (Sense - Up X 128)
S/N Ratio	More than 50 dB
White Balance	W-ATW / S-AWC / AWC / MANUAL (2500K ~ 9500°K)
Gamma Characteristic	0.45
Video output	1.0Vp-p 75 ohm Composite
Electronic shutter Speed	PAL : AUTO/MANUAL (X128~1/60SEC~ - 1/200,000sec) SENSE-UP & SENS-UP LIMIT IS SELECTABLE
OSD	BUILT-IN
BLC	LOW, MIDDLE, HIGH, OFF SELECTABLE
AGC	LOW, MIDDLE, HIGH, OFF SELECTABLE
DAY&NIGHT	AUTO / COLOUR ON
MIRROR	ON / OFF
SHARPNESS	ON / OFF (LEVEL ADJUSTABLE)
Power Supply	DC12V / AC24V
Power Consumption	250mA
Lens	C or CS Mount
Operational Temperature	-10Deg ~ +50 Deg C RH95% Max
Storage Temperature	-20Deg ~ +60 Deg C RH95% Max
Weight	Appx. 0.5Kg

Distributed by:



<http://www.austarsecurity.com.au>

Head Office

Unit 1, 2 Apollo Court
Blackburn, Victoria 3130

Tel: (03) 9894 0333
Fax: (03) 9894 4799

sales@austarsecurity.com.au

New South Wales

Unit 7, 8 Millennium Court
Silverwater, New South Wales 2128

Tel: (02) 9648 7744
Fax: (02) 9648 5455

nsw@austarsecurity.com.au